

PRODUCT CATALOG



CELLUX SHEET FABRIC



TRANSLUCENT TYPE

- Material : Polivynil Chloride (PVC)
- Thickness : 0.18 mm
- Width : 5 m
- Length : 100 m
- Weight : 200 gr/m²
- Warranty : 10 years
- Fire Rating : Type 2 Singapore Standar / EN 13501-1:2018
- Toxicity Emission : Type 2 Singapore Standar / EN 45545-2:2020 + A1:2023
- Smoke Density : Type 2 Singapore Standar / EN 13501-1:2018
- Light Transmission : Approax 75%



SILKY TRANSLUCENT TYPE


- Material : Polivynil Chloride (PVC) Pattern
- Thickness : 0.18 mm
- Width : 3.2 m
- Length : 100 m
- Weight : 200 gr/m²
- Warranty : 10 years
- Fire Rating : Type 2 Singapore Standar / EN 13501-1:2018
- Toxicity Emission : Type 2 Singapore Standar / EN 45545-2:2020 + A1:2023
- Smoke Density : Type 2 Singapore Standar / EN 13501-1:2018
- Light Transmission : Approax 75%




GLOSSY TYPE

- Material : Polivynil Chloride (PVC)
- Thickness : 0.18 mm
- Width : 3.2 m
- Length : 100 m
- Weight : 200 gr/m²
- Warranty : 10 years
- Fire Rating : Type 2 Singapore Standar / EN 13501-1:2018
- Toxicity Emission : Type 2 Singapore Standar / EN 45545-2:2020 + A1:2023
- Smoke Density : Type 2 Singapore Standar / EN 13501-1:2018


ALUMINUM FRAME

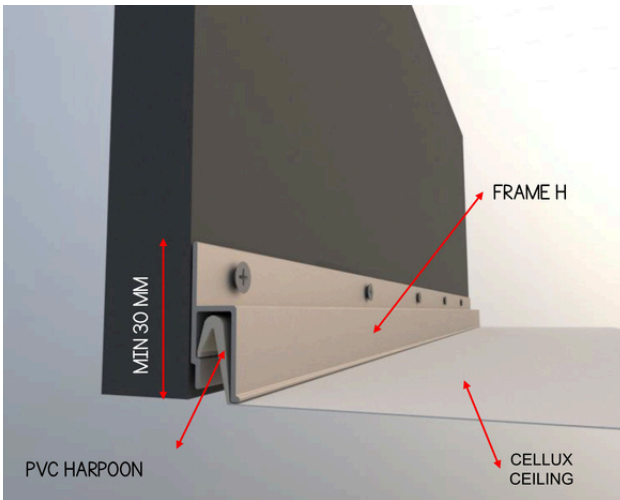


FRAME H




Available Colors : Silver (Customizable)
Length : 6 m

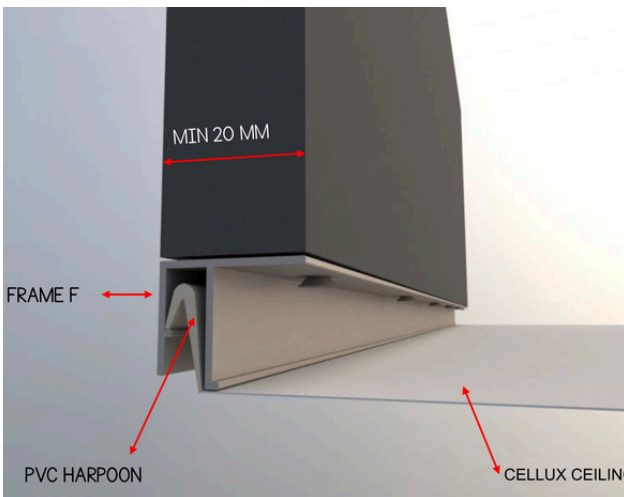


FRAME F



Available Colors : Silver (Customizable)
Length : 6 m

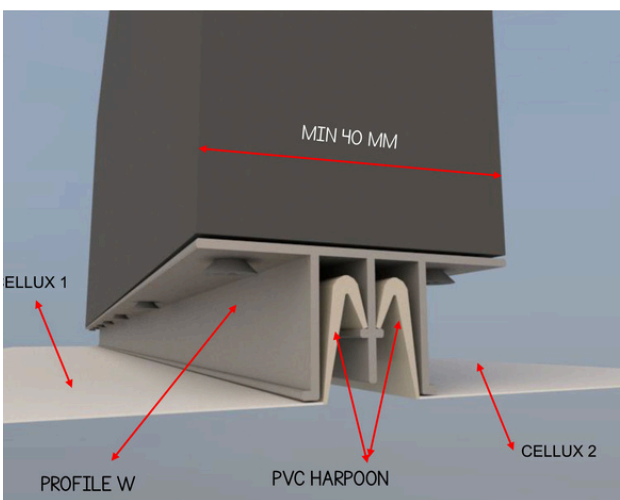


FRAME W

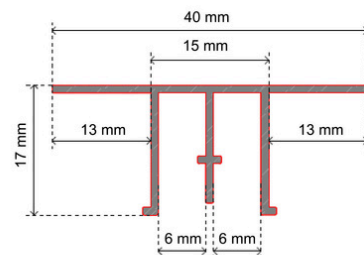


Available Colors : Silver (Customizable)
Length : 6 m

ALUMINUM FRAMEBOX

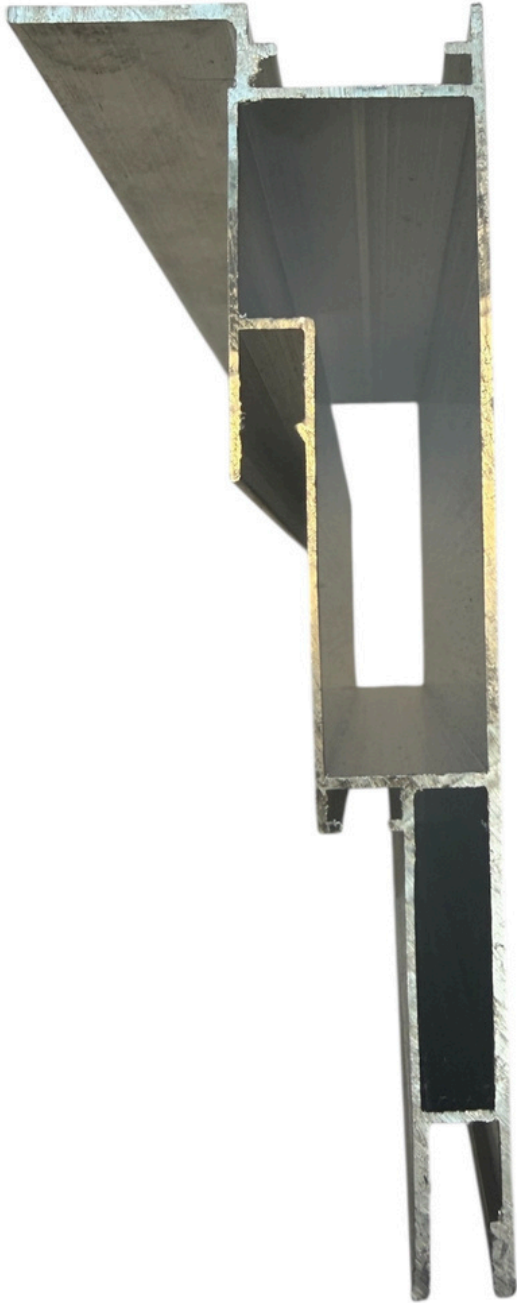

FRAMEBOX 12 CM

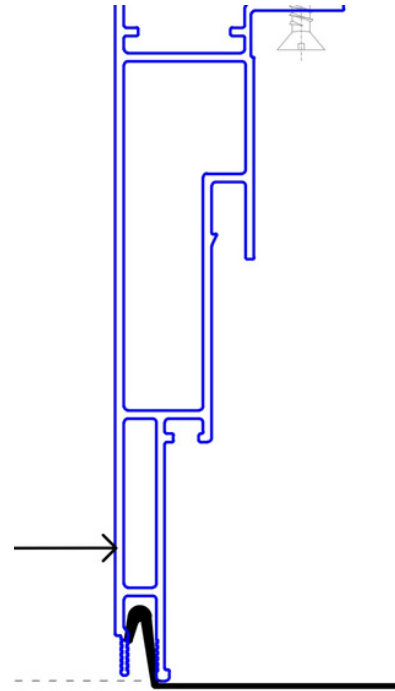

Available Colors : Silver (Customizable)
Length : 6 m

CELLUX LED LIGHT



LED LIGHT 1 TONE

Color Temperature	3000K/4000K/6500K
Voltage	DC 12V
Lumen	110-120 LM
LED Qty per Module	12 LED/pcs
Beam Angle	165 degrees
Dimension	960mm*17mm*5mm
Power	12W/pcs
Housing Material	PC Optical Lens
LED Type	3030
Certificate	CE RoHS

LED LIGHT 3 TONE

Color Temperature	2600K - 8600K (Adjustable)
Voltage	DC 24V
Lumen	500 LM / pcs (Maximum Power)
LED Qty per Module	3 nos. LED 2600K + 3 nos. LED 8600K
Beam Angle	168 degrees
Dimension	68mm*68mm*6mm
Power	5W/pcs
Housing Material	PC Optical Lens + Aluminum
Certificate	CE RoHS



LED LIGHT RGB

Colour	Full Color-1935IC
Voltage	DC 24V
Lumen	360LM / PCS
Beam Angle	160 degrees
Module Size	68mm*68mm*8mm
Power	3.6W/pcs
Material	Aluminum + PC optical lens
IC Chip	1935 IC
Certificate	CE RHOS
Line Spacing	15 cm
Packing	25pcs/set
Waterproof	IP68
Quality Assurance	5 years

POWER SUPPLY



STANDAR 400W-24V

Input : AC 100-250V (50/60Hz)
Output : DC 24V - 16.6A
Work temperature : Max 50°C
Power : 400W



STANDARD 400W-12V

Input : AC 100-250V (50/60Hz)
Output : DC12V - 33A
Work temperature : Max 50°C
Power : Max 400W



STANDARD 300W-24V

Input : AC 100-250V (50/60Hz)
Output : DC24V - 12.5A
Work temperature : Max 50°C
Power : Max 300W



STANDARD 300W-12V

Input : AC 100-250V (50/60Hz)
Output : DC12V - 25A
Work temperature : Max 50°C
Power : Max 300W



STANDAR 200W-12V

Input : AC 100-250V
Output : DC 12V - 16.6A
Work temperature : Max 50°C
Power : 200W



DIMMING 300W-12V SWITCH SYSTEM

Input : AC 170-250V (50/60Hz)
Output : DC12V - 25A
Support : TRIAC & 0-10V

CONTROLLER



RGB CONTROLLER

Input Voltage : DC5-24V

Output : SPI Signal x 2

Work Temperature : -25 - 55°C

MAX Pixel : 720

Support : Tuya Smart System

DIMMABLE CONTROLLER REMOTE SYSTEM

Input Voltage : DC12-24V

Output : 7.5A/Channel

Total Output : 15A Max

Work Temperature : -20 - 40°C

Support : Tuya Smart System



3 TONE CONTROLLER

Input Voltage : DC12-24V

Output : 7.5A/Channel

Total Output : 15A Max

Work Temperature : -20 - 40°C

Support : Tuya Smart System

DIMMABLE CONTROLLER DALI SYSTEM

Input Voltage : DC12-24V 16.8A

Output : DC12/24V 1CH-16.8A Max

Work Temperature : -20 - 50°C

LED CV modules only

Support : DALI Smart System

REMOTE CONTROL



RGB REMOTE

Model : RGB&RGBW&RGBBCCT



DIMMABLE REMOTE

Model : CCT Remote Control



3 TONE REMOTE

Model : 3 Tone Remote